



500±30

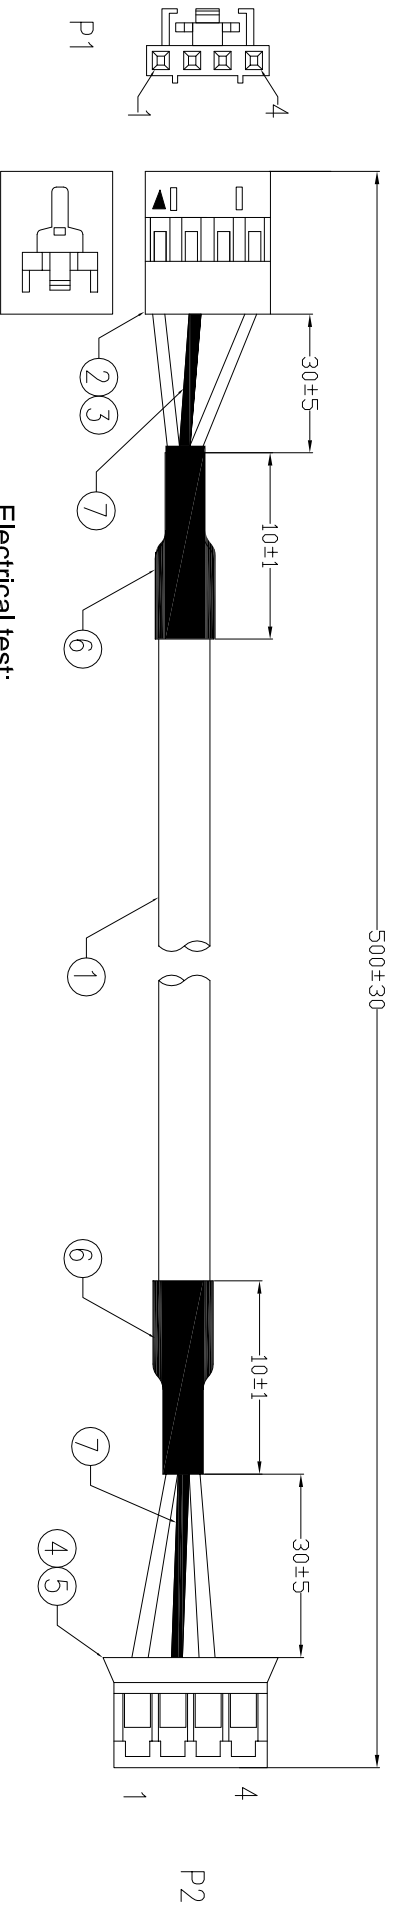

- Electrical test:
1. 100% short, open, miss wire test
 2. Conduct resistance: 1 Ohm(max)
 3. Insulation resistance: 10Mohm(min)
 4. Dielectric test: DC 300V

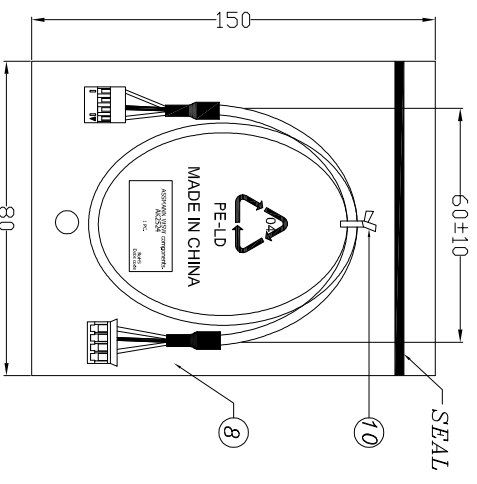

PIN ASSIGNMENT			
P1	WHITE	P2	
4	DRAIN	1	
2	RED	2	
1		3	

NO.	NAME	QTY	SPECIFICATION
⑩	TIE	1	WHITE L=60mm
⑨	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"±"10PCS".
⑧	PE BAG	1	CLEAR SIZE: 80*150*0.05mm PRINT BLACK"MADE IN CHINA".
⑦	TUBE	2	HEAT SHRINK TUBE BLACK OD1.0* $L=38\pm 1$ mm
⑥	TUBE	2	HEAT SHRINK TUBE BLACK OD3.0* $L=10\pm 1$ mm
⑤	TER	3	PITCH2.0MM MATERIAL:PHOSPHOR BRONZE TIN-PLATED (ZYA2002H-4P)
④	HSG	1	PITCH 2.0mm 1*4P HSG WHITE (ZYA2002H-4P)
③	TER	3	DUPont TER PH2.54mm MATERIAL:BRASS TIN-PLATED CRIMP TYPE(ZAY25241HM-04)
②	HSG	1	DUPont HSG 1*4P PH:2.54mm COLOR:BLACK Hook(ZAY25241HM-04)
①	CABLE	1	UL2547 28AWG*2C(WHITE,RED)+D JACKET GREY(A-112#) OD2.8mm L=500±5L-0MM

RoHS compliant
Unit: mm

Scale	Free	Customer-No.
TOLERANCE		
		ASSMANN WSW-No. AK2524
DIM	TOL	Drawing-No. ASS 7881 CA
		Replace rev00
Angle	TOL	Sheet
①	Drawn	
	Modification	
	Date	
	Name	



1	2	3	4	5	6	7
---	---	---	---	---	---	---